

A computer oriented formulation for geometrically nonlinear problems

Autor(en): **Yoshida, Yutaka / Nishiwaki, Takeo / Masuda, Nobutoshi**

Objekttyp: **Article**

Zeitschrift: **IABSE congress report = Rapport du congrès AIPC = IVBH
Kongressbericht**

Band (Jahr): **11 (1980)**

PDF erstellt am: **25.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-11336>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.


A COMPUTER ORIENTED FORMULATION FOR GEOMETRICALLY NONLINEAR PROBLEMS
 EINE COMPUTER-ORIENTIERTE FORMULIERUNG FÜR GEOMETRISCHE NICHTLINEARE PROBLEME
 UNE FORMATION POUR DES PROBLÈMES NON LINÉAIRE GÉOMÉTRIQUE

Yutaka YOSHIDA TOKYO INST. TECH.
 Takeo NISHIWAKI MUSASHI INST. TECH.
 Nobutoshi MASUDA

DERIVATION OF ELEMENT EQUATION

$$1. \text{ COORDINATES } x \text{ AND DISPLACEMENTS } u^T = (d^T \theta^T)$$

IN GLOBAL COORDINATE SYSTEM (x y z)

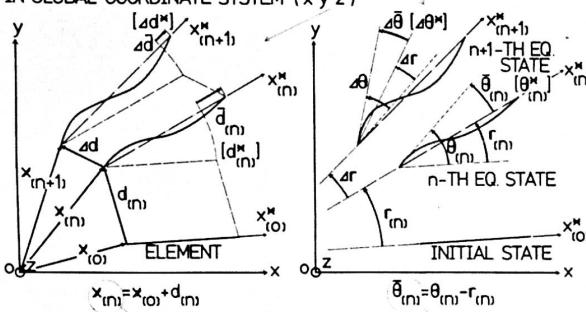

$$2. \text{ DISPLACEMENTS } u^T = (d^T \theta^T) \text{ IN LOCAL SYSTEM } (x^* \ y^* \ z^*)$$

$$d_{(n)}^* = A_{(n)} \bar{d}_{(n)} = A_{(n)} x_{(n)} - A_{(0)} x_{(0)}$$

$$\theta_{(n)}^* = A_{(n)} \bar{\theta}_{(n)}$$

$A_{(n)}$: COORDINATE TRANSFORMATION MATRIX

$$3. \text{ INCREMENTAL NODAL DISPLACEMENTS IN LOCAL COORDINATE SYST. (FROM N-TH TO N+1-TH EQUILIBRIUM STATE)}$$

$$\Delta u^* = u_{(n+1)}^* - u_{(n)}^* = A T \left(\begin{matrix} x \\ \theta \end{matrix} \right)_{(n)} + T_{(n+1)} \left(\begin{matrix} \Delta d \\ \Delta \theta \end{matrix} \right) \quad ; \quad T_{(n)} = [A \quad I]$$

$$= A T \left(\begin{matrix} x \\ \theta - r_{(n)} \end{matrix} \right)_{(n)} + T_{(n+1)} \left(\begin{matrix} 0 \\ -\Delta r \end{matrix} \right) + T_{(n+1)} \Delta u$$

$$4. \text{ FORCE-DISPLACEMENT RELATION IN LOCAL COORDINATE SYSTEM}$$

ASSUMPTION OF SMALL STRAIN

$$\Delta f^* = K^* \Delta u^*$$

K^* : CONVENTIONAL LINEAR STIFFNESS MATRIX

$$5. \text{ RELATION BETWEEN LOCAL AND GLOBAL NODAL FORCES}$$

$$\Delta f = f_{(n+1)} - f_{(n)} = A T f^*_{(n)} + T^T_{(n+1)} \Delta f^*$$

6. FORCE-DISPLACEMENT RELATION IN GLOBAL SYSTEM [EQ. A]

$$\Delta f = A T f^*_{(n)} + T^T_{(n+1)} K^* [A T \left(\begin{matrix} x \\ \theta - r_{(n)} \end{matrix} \right)_{(n)} + T_{(n+1)} \left(\begin{matrix} 0 \\ -\Delta r \end{matrix} \right)] + T^T_{(n+1)} K^* T_{(n+1)} \Delta u \quad \text{KNOWN}$$


FUNCTIONS OF UNKNOWN INCREMENTAL DISPLACEMENTS Δu

DEVELOP OF A TWO STEP APPROX. & CORRECT. ITERATION SOL. PROC.


In the first two steps, EQ.A is linearized with respect to Δu , before the assemblage of element equations. Then in iterations, only Δu_{k+1} are treated as unknowns, others are estimated by using k-th approximation of Δu .

NUMERICAL EXAMPLES

1. CONVERGING PROCESS ILLUSTRATED BY DEFORMED CONFIGURATIONS

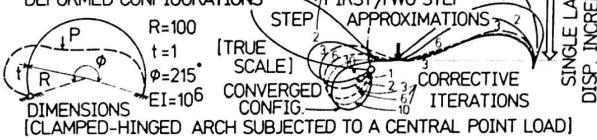

2. SNAP-THROUGH AND BIFURCATION ANALYSIS OF A FLAT ARCH (RISE/SPAN RATIO : 1/100) ONLY BY INCREMENTAL CALCULATION

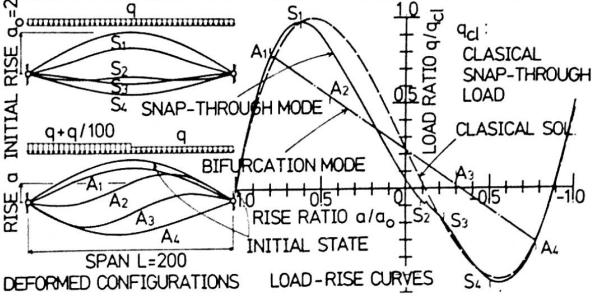



A COMPUTER ORIENTED FORMULATION FOR GEOMETRICALLY NONLINEAR PROBLEMS

Yutaka YOSHIDA
Associate Professor
Tokyo Institute of Technology

Takeo NISHIWAKI
Professor
Musashi Institute of Technology

Nobutoshi MASUDA
Lecturer
Musashi Institute of Technology

FORMULATION OF THE ELEMENT EQUATION

An incremental formulation is developed here, under the assumption of large displacement but small strain. The key point of the formulation is the description of nodal locations by the coordinates themselves instead of by mere displacements. A local coordinate system ($x^* y^* z^*$) is introduced which is at any time on the element itself, and the element force-displacement relation is assumed to be linear in this local system. The geometrical nonlinearity is considered only through the nonlinear transforming relations of displacement components between the space-fixed global coordinate system ($x y z$) and the element-fixed local coordinate system. The transformations are evaluated rigorously without neglecting small terms, so that incremental relations satisfy equilibrium conditions after deformation as accurately as possible.

SOLUTION PROCEDURE

To construct and solve structural equilibrium equations, an effective corrective iteration solution procedure is also originally developed. The process, outlined in the following, makes use of physical properties of each term in the derived element equation. At first, the changes of transformation matrix and rigid body rotation in the element equation, ΔT and Δr respectively, are linearized with respect to incremental displacement Δu at the n -th equilibrium state A. And the transformation matrix after the increment, $T(n+1)$, is estimated at the same state A. Hence the element incremental equation is written in the following quasitangential form.

$$\Delta f = (K_f + K_u + K) \Delta u$$

Then summing up the element incremental equations thus approximated for overall structure and solving them, the first approximation of the $n+1$ -th equilibrium state C is obtained. Secondly, ΔT and Δr are linearized at the midpoint B between A and C, meanwhile $T(n+1)$ is approximated at the above obtained first approximating state C. Thus the element incremental equation is written as

$$\Delta f = (K_f + K_u + K)_{B,C} \Delta u$$

Thus the second approximating solution, denoted by D, can be obtained. Then afterwards in iterations, ΔT and Δr as well as $T(n+1)$ are all evaluated by using the just preceding approximating solution, and only the incremental displacement Δu is treated as unknown variable. Namely, for the $k+1$ -th approximation

$$\Delta f - h_k = K_k \Delta u$$

is used, where

$$K_k = T_k^T K * T_k, \quad h_k = T_k^T f^*_{(n)} + T_k^T K * (\Delta T_{\theta-r}^x)_{(n)} + T_k^T (-\Delta r)^0$$

and

$$\Delta T = T_k - T_{(n)}, \quad \Delta r = r_k - r_{(n)}$$

The iteration is continued until satisfactory convergence is obtained.

FEATURES OF THE PROPOSED METHOD

- With mere incremental calculations and without special techniques such as eigenvalue analysis, not only snap-through and limit point phenomena but also bifurcation can be pursued.
- Even for an extraordinary large increment, numerical stability exists and sufficient accuracy is obtained.
- As the consequence of the above characteristics, calculating time can be reduced considerably.