

# **Steel bridge girders, cost optimization**

Autor(en): **Haas, G. / Ostenfeld, Klaus H.**

Objekttyp: **Article**

Zeitschrift: **IABSE congress report = Rapport du congrès AIPC = IVBH  
Kongressbericht**

Band (Jahr): **12 (1984)**

PDF erstellt am: **25.05.2024**

Persistenter Link: <https://doi.org/10.5169/seals-12239>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

## Steel Bridge Girders, Cost Optimization

G. HAAS and Klaus H. OSTENFELD

Cowiconsult  
Consulting Engineers and Planners  
Virum, Denmark


The steel box girder for the 3.3 km long bridge at Farø, Denmark has been made competitive by use of unusual design and construction methods.

A considerable saving has been possible by omission of painting of internal surfaces of the box girder, which amounts to more than 80% of the total steel surface. The corrosion protection of these surfaces is accomplished by ventilation by means of dehumidified air. The six dehumidification units represent low initial investment and are very economical in operation, each covering 5-600 m of bridge girder length. The external surface of the box girder to be painted has been reduced to a minimum by choice of a special cross section shape (refer to Farø bridge cross section below) with smooth exterior permitting an inexpensive initial painting cost and low maintenance.

The girder is composed of uniform steel panels welded by automatic welding, and a special assembly detail between exterior panels and diaphragms each 4 m has been detailed so as to require minimum of tight tolerance control during fabrication.

The box girder has been fabricated in a ship yard, all welded in full span sections each 80 m, and erected by simple lowering directly onto the pier tops. The girder continuity over full bridge length (1.6 km and 1.7 km) is subsequently established by field welding of box girders over the piers.

The bridge connection at Farø, which is part of European main highway E4, is presently under construction and is scheduled for completion Summer 1985.

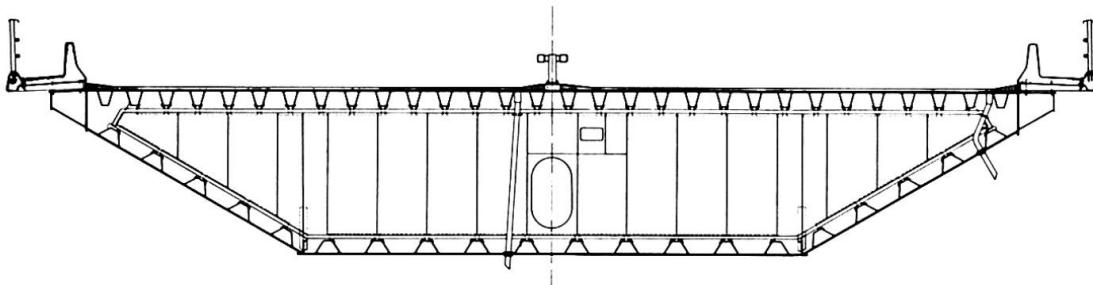

Farø Bridge Cross Section

# STEEL BRIDGE GIRDERS, COST OPTIMIZATION

Fabrication and maintenance costs for steel box girders may be optimized by:

1. Using identical or few types of similar panels
2. Using simple panel connections for assembly of box cross sections
3. Minimising the exterior surface area
4. Corrosion protection of the box interior by dehumidification.

The steel box girders for the Farø Bridges were developed to satisfy the above criteria, and proved to be economically competitive in comparison with post-tensioned concrete box girders.

The internal corrosion protection scheme by circulation of dry air offers significant cost savings.

The dehumidification unit is based on the absorption principle and consist of readily available standard components. The steel surface is completely corrosion protected by relative humidities below 60%.

Dehumidification systems have been used in the Lille Bælt suspension bridge box girder since 1970, and the operating costs have been extremely low (approx. 1.5 US Cent per sq.m. per year). A similar installation will be used in the Farø Bridges, presently under construction in Denmark and scheduled for completion in 1985.



Owner: The Road Directorate, Denmark  
Design and Supervision: Cowiconsult, Denmark  
Fabrication and Erection: Monberg & Thorsen A/S, Denmark

## Relative humidity in box girder

### Corrosion protection of external and internal steel surfaces




### COSTS FOR CORROSION PROTECTION FOR 1 m<sup>2</sup> DECK AREA

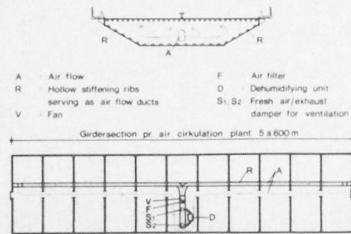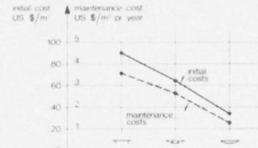

## Lille Bælt Bridge

1970





Steel box girder  
Total length of girder 1.080 m  
Total steel deck area 29.000 m<sup>2</sup>  
Total steel weight in girder 12.000 t

Steel surface  
Area 200.000 m<sup>2</sup>  
Internal surface 76.000 m<sup>2</sup>  
External surface 42.000 m<sup>2</sup>  
Corrosion protection Paint

## Farø Bridges

1985

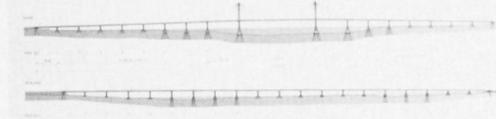

Steel box girder  
Total length of girder 3.326 m  
Total steel deck area 64.000 m<sup>2</sup>  
Total steel weight in girder 23.000 t

Steel surface  
Area 320.000 m<sup>2</sup>  
Internal surface 76.000 m<sup>2</sup>  
External steel surface 244.000 m<sup>2</sup>  
Corrosion protection Paint  
Initial cost: For each 500-600 m girder length 0.10 million US \$  
Maintenance cost: 0.01 million US \$/year 2.20 million US \$/year 0.08 million US \$/year