

Zeitschrift: IABSE reports = Rapports AIPC = IVBH Berichte
Band: 64 (1991)

Artikel: Vibration amplitudes of steel railway bridges
Autor: Kondratov, V.
DOI: <https://doi.org/10.5169/seals-49362>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

Download PDF: 30.03.2025

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

Vibration Amplitudes of Steel Railway Bridges

Amplitude des vibrations de ponts ferroviaires métalliques

Schwingungsamplituden in Eisenbahn-Stahlbrücken

V. KONDRATOV

Assist. Prof.

Leningrad Inst. of Railway Engineers

Leningrad, USSR

A method of calculation of element vibration amplitudes of high-speed railway metal bridges is given in the paper. Sometimes high-frequency stresses, caused by vibrations, can significantly reduce the durability of metal bridge elements [1]. The operation of such bridge structures proves that vibrations of separate elements of lattice span structures increase with the growth of the trains' speeds. The main cause of the above-mentioned phenomenon seems to be the high-frequency dynamic forces, resulting from the "carriage wheel-bridge railway track" interaction.

Structural models selected for the problem in question are given in Fig.1 and 2.

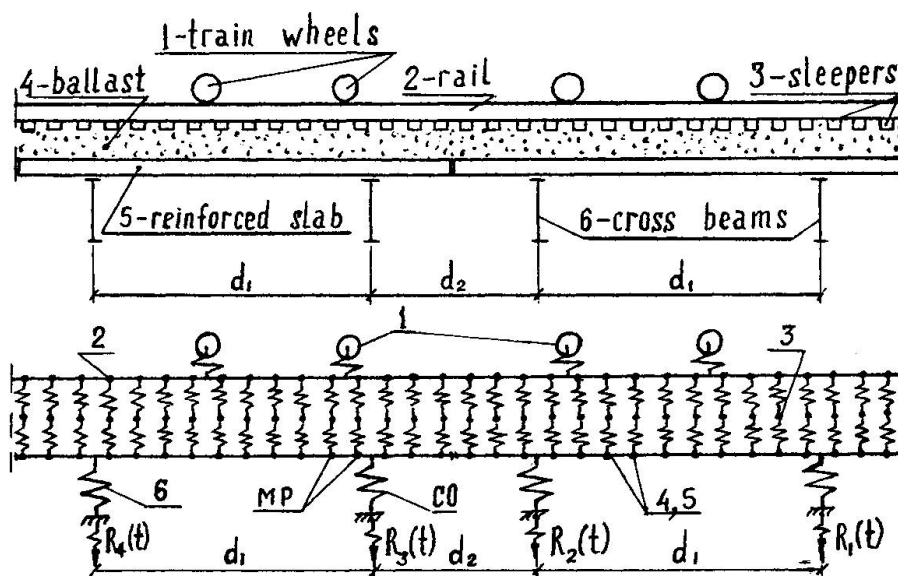


Fig.1

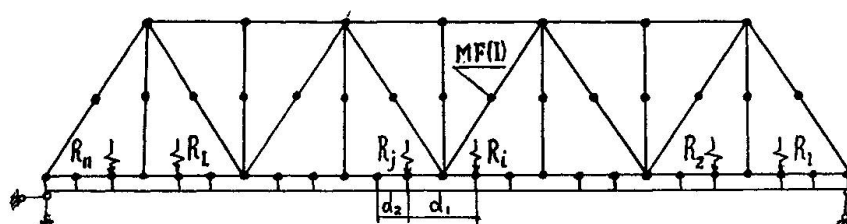


Fig.2

Metal span structures for the high-speed railway bridges are supposed to have rigid bottom chord and the continuous welded track placed on the ballast. The problem is solved in two stages. At the first stage on the basis of both the adopted structural model (see Fig.1), and mathematical model of "carriage wheels - bridge floor - bridge roadway" system variable reactions $R_i(t)$ at the elastic supports with CO stiffness are estimated. These elastic supports model the cross-beams of the span structure. At the second stage accelerations $\ddot{YF}(I)$ and displacements $YF(I)$ of masses which model the elements of the main trusses are determined (see Fig.2). Oscillations of these masses are caused by dynamic forces $R_i(t)$ and are described by the equations as

$$MF(I) \cdot \ddot{YF}(I) = R(I,t) - \sum K(I, J) \cdot YF(J) - \sum \dot{YF}(J) \cdot B(I, J), \quad (1)$$

where $MF(I)$, $YF(I)$ are mass and displacement of the first unit of the truss; $K(I, J)$, $B(I, J)$ are coefficients of rigidity and resistance of the system.

$R_i(t)$ - force, transferred to the first mass of the bottom chord of a truss from the bridge roadway, is determined by the following expression

$$R(I,t) = MP(YP(J) + YP(J+1))/2, \quad (2)$$

where $YP(J)$ and $YP(J+1)$ are accelerations of the roadway slab masses MP , between which the elastic support CO is placed (see Fig.1).

The estimation of $YP(J)$ and $YF(J)$ values is based on the numerical integration of the movement of masses, shown in Fig.1 and 2, by Predictor-Corrector Method [2]. The problem statement allows to take into account one-sided ties at the "wheel-rail" contact and during the "sleeper-ballast" interaction. Integration step T depends on dynamic parameters of the system in question. Generally T is adopted by an order of magnitude less than the minimum period of natural oscillations of the system ($T = 10^{-3} - 10^{-5}$ s.)

REFERENCE

- 1) KONDRATOV V. The Vibration of Lattice's Elements of Metal Span Structure Main Trusses of the Railway Bridges. Diss. for the Degree of Cand. of Sci., Leningrad, 1984.
- 2) VASSILYEV B. Numerical Simulation by the Particles Method in the Problems of Mechanics of the Media Deformed. Moscow, Transport, 1990, pp 188-197.

Leere Seite
Blank page
Page vide