

Fair-ground roof, Milano (Italy)

Autor(en): **Majowiecki, M.**

Objekttyp: **Article**

Zeitschrift: **IABSE structures = Constructions AIPC = IVBH Bauwerke**

Band (Jahr): **11 (1987)**

Heft C-41: **Tensostructures**

PDF erstellt am: **01.09.2024**

Persistenter Link: <https://doi.org/10.5169/seals-20374>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.



5. Fair-Ground Roof, Milano (Italy)

Owner: Ente Auton. per le Fiere di Milano
Architects: Studio Tecnico Majowiecki & Assoc.; Arch. Dept. Plasteco Milano
Structural Engineers: Studio Tecnico Majowiecki & Associates; Ing. L. Antonietti
General Contractor: Canobbio S.p.A., Milano
Cable Structure: Redaelli Tecna S.p.A., Milano
Steel Structure: Nuova Italsider, Genova; CO.ME.F. S.r.l., Milano
Total Floor Area: 6000 m²
Construction Period: January – April 1986

Introduction

On the occasion of the main fair manifestation called April's Fair, the International Fair of Milano decided, in 1986, to cover the main square (Piazza Italia).

The design hypothesis required that the following objectives be aimed at

- absence of internal supports;
- convertibility;
- impressive light architectural image;
- translucent covering material;
- easy and fast execution and erection.

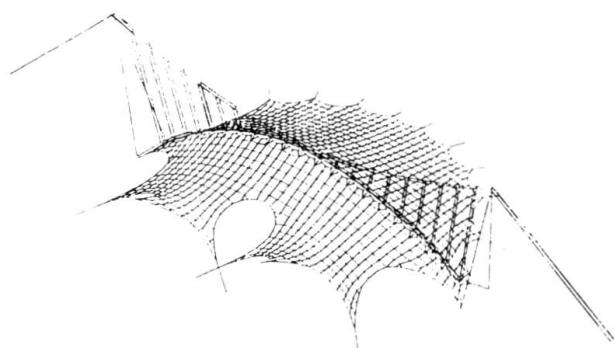


Fig. 1 Interactive graphic design

The covering remains in place from springtime to autumn and is dismantled during wintertime.

Several new open-air exhibitions and shows will be possible with this light, versatile, impressive and low-cost tension-membrane construction.

The building site was opened in January and finished in the beginning of April 1986.

Outline of the Structural System

The main system, oriented along the principal axis of the roof surface, is formed of a pre-stressed cable-truss which has a span of 125 m.

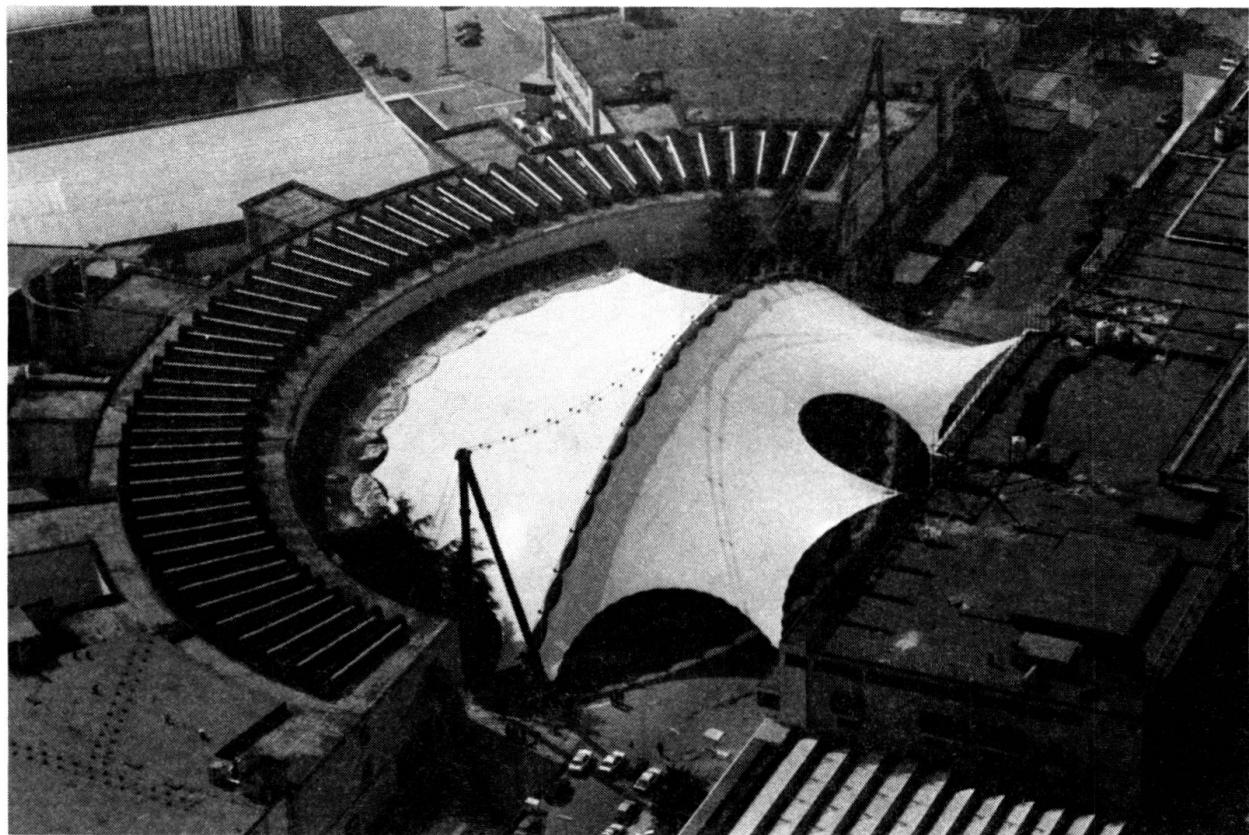


Fig. 2 Aerial view of the construction

The upper carrying rope has a sag of 13 m. It is made of four spiral zinc-coated (class B) cables of 42 mm diameter, construction 127 wires of 3.2 mm with 1600 N/mm^2 breaking strength. The lower stabilizing rope, with the same cable data, is anchored directly in the ground with a span of 105 m and a sag of 23 m. The upper and lower cables are diagonally connected with 2+2 12 mm spiral strands, through special friction steel cable fittings.

The anchorage system is realized with a tripod that consists of two V-shaped steel columns and an external back-stay obtained with the same carrying rope. The columns are 900 mm diameter and 12 mm thickness made with FE 510 B steel grade.

At the top there is a saddle with a ratio between saddle radius to strand diameter of 20. At the bottom of the columns, spherical hinges are placed in order to facilitate erection and permit in-service rotations.

Foundation systems were obtained with high diameter piles. The membrane, realized with polyester coated with P.V.C., has been designed in order to satisfy border conditions and an initial pre-stressing condition.

(M. Majowiecki)

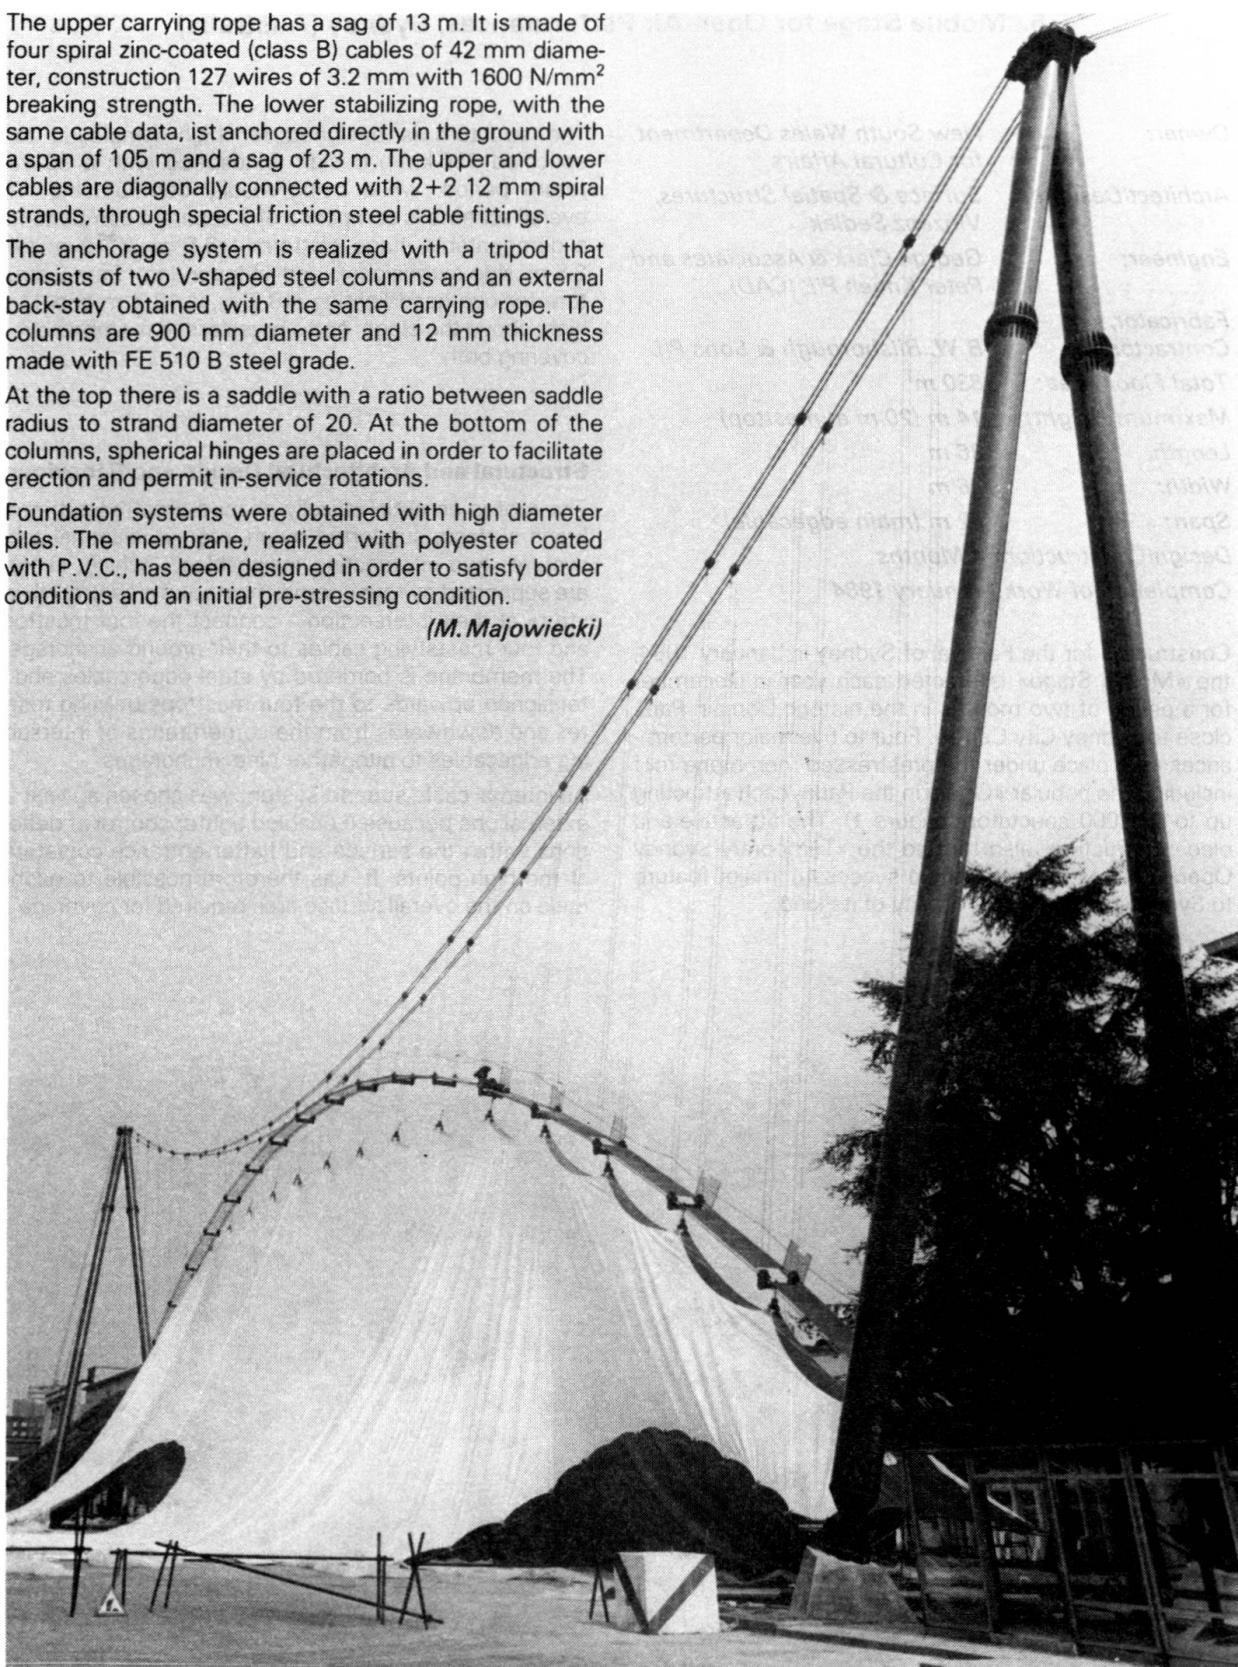


Fig. 3 Main rope truss and membrane during erection