

Zeitschrift: IABSE reports of the working commissions = Rapports des commissions de travail AIPC = IVBH Berichte der Arbeitskommissionen

Band: 14 (1973)

Artikel: Vibration damping of structures

Autor: Ito, Manabu

DOI: <https://doi.org/10.5169/seals-14468>

Nutzungsbedingungen

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. Siehe Rechtliche Hinweise.

Conditions d'utilisation

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. Voir Informations légales.

Terms of use

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. See Legal notice.

Download PDF: 08.11.2024

ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>

II

DISCUSSION LIBRE • FREIE DISKUSSION • FREE DISCUSSION

Vibration Damping of Structures


Amortissement de vibrations dans les structures

Dämpfung von Vibrationen an Tragwerken

Manabu ITO
Professor of Civil Engineering
University of Tokyo
Tokyo, Japan

In their contributions in the Preliminary Report, Y. Yamada¹⁾ and S. Mentel²⁾ reported that the damping constant increased with the increase of initial amplitude.

However, it should be noted that the above tendency reveals itself when the initial amplitude exceeds a certain critical value, beyond which friction damping or hysteretic damping seem to come into effect. An example³⁾ in the figure below and Figs. 5 to 7 in the paper by Mentel²⁾ show that the logarithmic decrement is almost independent on the initial amplitude when the amplitude is not large. But the general estimation of the critical initial-amplitude mentioned above is not

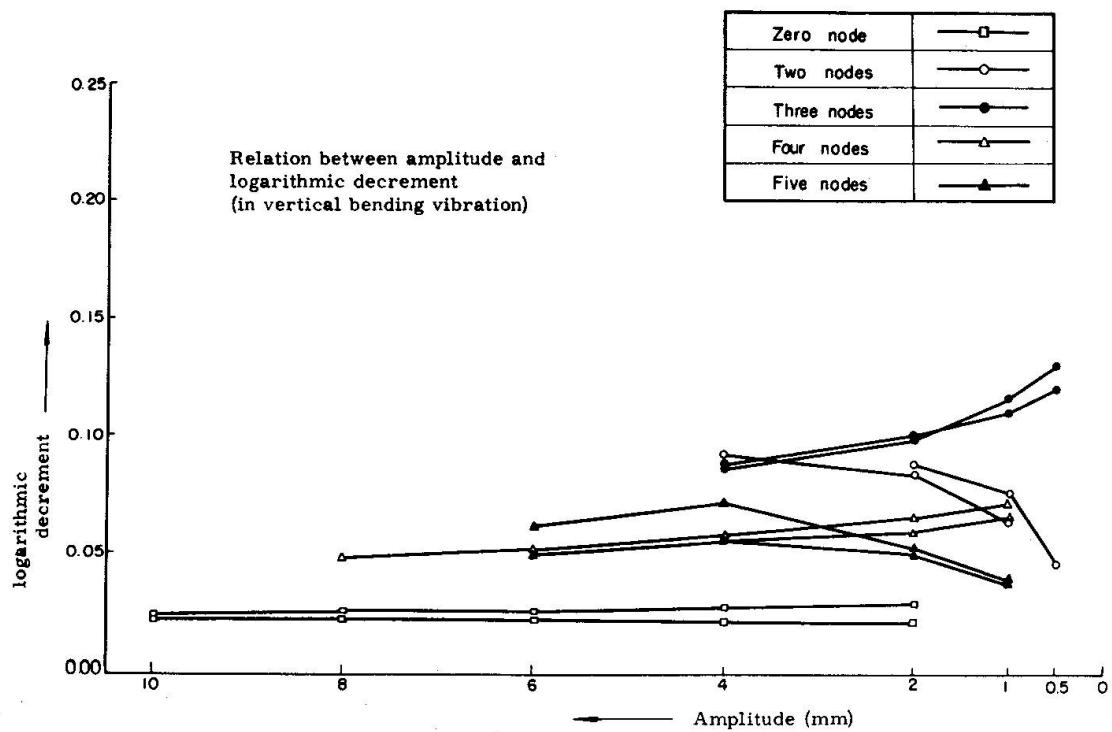

Relation between damping and initial amplitude
A truss-stiffened suspension bridge with a span length
of 180 m. Data after Okubo and Narita, 1969.

clarified at the present stage.

Next, the writer should like to make a short supplemental comment on his contribution in the preliminary report. The logarithmic decrement is not always constant even in a particular oscillograph record of the free vibration test, and therefore, the values of logarithmic decrement referred in his contribution are the average value from many subsequent, usually ten to fifty, waves. In the range of small amplitude, the global value of logarithmic decrement seemed to be approximately constant, that is, the nature of damping was considered as viscous one.

REFERENCES

- 1) Yamada, Y.: Studies on Vibration Damping of Steel Structures, Preliminary Report, Symp. Resistance and ultimate deformability of structures acted on by well defined repeated loads, IABSE, Lisboa-1973.
- 2) Mentel, S.: Model Tests on Structural Damping in Bridges, ditto.
- 3) Okubo, T. and Narita, N.: An Experimental Study of Dynamic Characteristics of the Kompira Bridge, Tech. Note, ST-4, Public Works Res. Inst., Japanese Gov., Dec. 1969.