

# **Steel and reinforced concrete railway structures**

Autor(en): **Volodin, G.I. / Gitman, E.M. / Monov, B.N.**

Objekttyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **64 (1991)**

PDF erstellt am: **15.08.2024**

Persistenter Link: <https://doi.org/10.5169/seals-49299>

## **Nutzungsbedingungen**

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

## **Haftungsausschluss**

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Ein Dienst der *ETH-Bibliothek*

ETH Zürich, Rämistrasse 101, 8092 Zürich, Schweiz, [www.library.ethz.ch](http://www.library.ethz.ch)



## Steel and Reinforced Concrete Railway Structures

Structures en acier et en béton armé pour les ponts de chemin de fer

Eisenbahn-Brückenüberbauten aus Stahl und Stahlbeton

**G.I. VOLODIN**

Civil Engineer  
Giprotransmost  
Moscow, USSR

**E.M. GITMAN**

Civil Engineer  
Giprotransmost  
Moscow, USSR

**B.N. MONOV**

Civil Engineer  
Giprotransmost  
Moscow, USSR

For high-speed construction of railway bridges metal box and two-block steel reinforcement concrete superstructures of high plant manufacture readiness with 23.0 to 45.0 m spans ballast-run, designed for installation on straight and curved ( $R > 300$ ) road sections under the conventional and northern climatic conditions, as well as in seismic regions, have been developed.

The superstructures were designed for a single track, that allowed their installation on the multitrack bridges having a common ballast tank. The ballast tank has the width of 4.6 m and is envisaged for the track operations on bridges including cleaning of broken stones with the help of tracking machines.

The structure material - low-alloy steel of grades C35 and C40, concrete of glass B35. For all mounting connections high strength bolts are used.

For maintenance of superstructures, passagess along the lower boom and hatches in the box girder bearing sections have been envisaged.

For the structure Specifications refer to the table.

N	Name	Metal box superstructure, m				Two-block steel reinforcement concrete superstructure, m			
		23,0	27,0	33,6	45,0	23,0	27,0	33,6	45,0
1	Construction height, H, m	2,1	2,6	3,1	3,7	2,2	2,4	2,8	3,5
2	Mass of metal, t	52,0	65,0	87,0	134,0	40,0	50,0	75,0	124,0
3	Volume of concrete, m <sup>3</sup>	-	-	-	-	27,0	32,0	38,0	52,0

Table

The superstructure arrangement wholly corresponds to the high-speed mounting without intermediate supports by the jib (type ГЭК-80 and ГЭМК-130) and boom cranes.

Metal superstructure (Fig.1,a) consists of the fully prefabricated erection blocks: main box-section hermetical girder; cantilever elements of the ballast tank, separated according to the transportation conditions from the main girder along the boarding with a longitudinal joint; side-walk blocks and inspection runways.

The roadway has a double-deck construction. Boarding of the ballast tank is made of the double-layer corrosion-resistant steel ensuring an overhaul-free period equal to the service life of the entire superstructure.

The two-block steel reinforced concrete superstructures (Fig.1,b) consist of two steel reinforced concrete fully prefabricated blocks joined in erection with cross linkage, as well as of the precast reinforced concrete side-walk rim. Each block consists of a steel box main girder and engaged into operation of the cast in-situ concrete ballast tank plate having hydraulic insulation and protective layer.

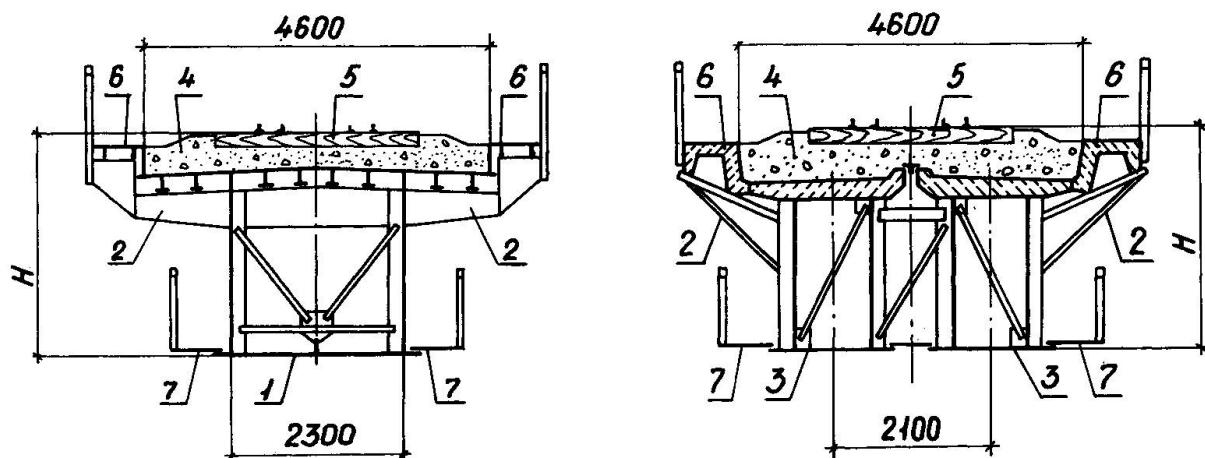


Fig. 1 Cross section of railway superstructures:

a - of the metal box one having the ballast tank of double-layer corrosion-resistant steel; b - of the two-block steel reinforced concrete;  
1 - box girder; 2 - cantilever part; 3 - steel reinforced concrete block;  
4 - ballast; 5 - upper road structure; 6 - side-walks; 7 - inspection runway.  
H - construction height.