

Construction of the Kurushima bridge

Autor(en): **Kanisawa, Yasuhito / Fujii, Hiroshi / Kawaguchi, Koji**

Objekttyp: **Article**

Zeitschrift: **IABSE reports = Rapports AIPC = IVBH Berichte**

Band (Jahr): **79 (1998)**

PDF erstellt am: **27.06.2024**

Persistenter Link: <https://doi.org/10.5169/seals-59838>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Ein Dienst der *ETH-Bibliothek*


ETH Zürich, Rämistrasse 101, 8092 Zürich, Schweiz, www.library.ethz.ch

Construction of the Kurushima Bridge



Yasuhito KANISAWA
Gen. Mgr, Third Constr. Bur.
Honshu Shikoku Bridge Auth.
Onomichi, Japan

Born in 1944, got his Civil Eng. degree at Tokoku Univ. Since 1996 he has been the Gen. Mgr of the Third Constr. Bureau of H.S.B.A.

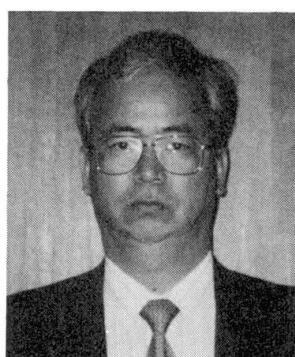

Hiroshi FUJII
Gen. Mgr, Imabari Constr.
Honshu Shikoku Bridge Auth.
Imabari, Japan

Born in 1948, got his Civil Eng. degree at Waseda Univ. Since 1997 he has been the Gen. Mgr of the Imabari Constr. Office of H.B.S.A.



Koji KAWAGUCHI
Mgr, Third Constr. Bur.
Honshu Shikoku Bridge Auth.
Onomichi, Japan

Born in 1953, got his Civil Eng. degree at Tokyo Institute of Technology. Since 1996 he has been the Mgr, Design Div. of Third Constr. Bureau of H.S.B.A.

1. Outline

The Kurushima Bridge, located on the Onomichi-Imabari Route of the Honshu-Shikoku Bridges, is the three connecting suspension bridges across the Kurushima Strait. The Kurushima Strait with its beautiful scenery is designated as one of Japan's national parks. The strait is approx. 4 km wide and divided into three marine traffic routes by the two small islands. Compounding the heavy shipping traffic, the strait is hazardous for its geographical conditions characterized by numerous


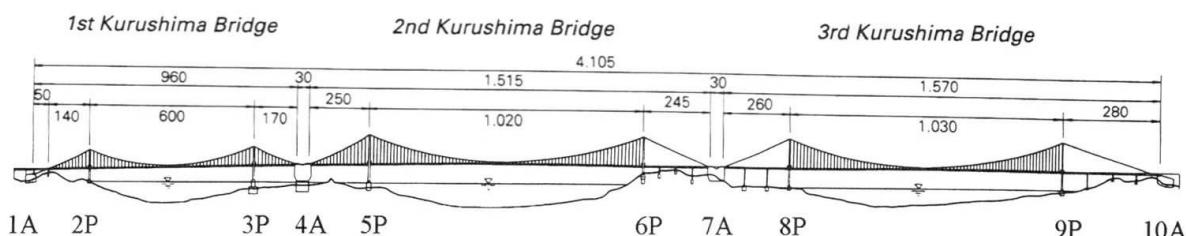


Fig. 1 General view of the Kurushima Bridge

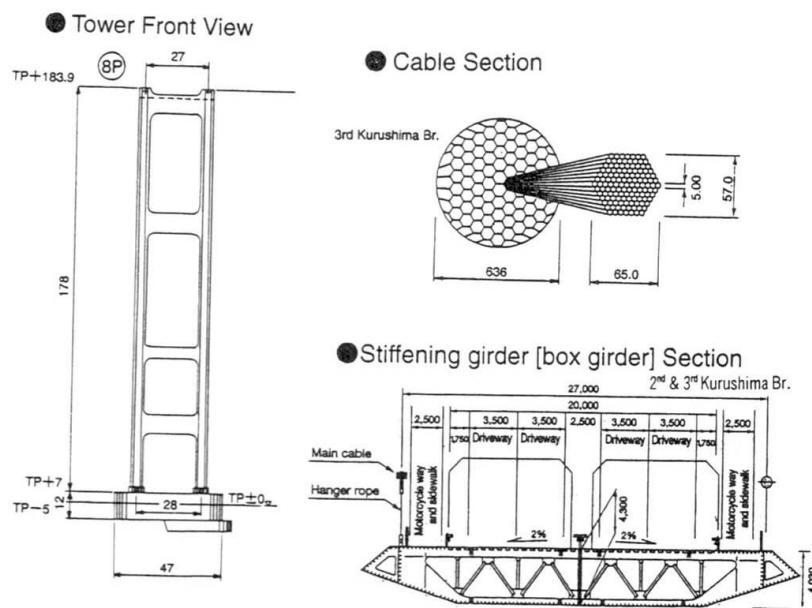

islets and swift tidal current with a maximum velocity of 10 knots. The construction work started in September of 1990 and will be finished in 1999.

2. Towers

The tower height is generally determined so that the sag ratio may become optimum in dynamics and economy and the line linking the tower tops may become parallel to the vertical alignment of the girder. However, in the case of this bridges, this manner brings about the discontinuity of the towers' height, because the center span length of 1st bridge is shorter than that of 2nd and 3rd bridge. Therefore, the special consideration was paid for aesthetics and the towers' heights were determined in the manner of continuous variation through the comparative study.

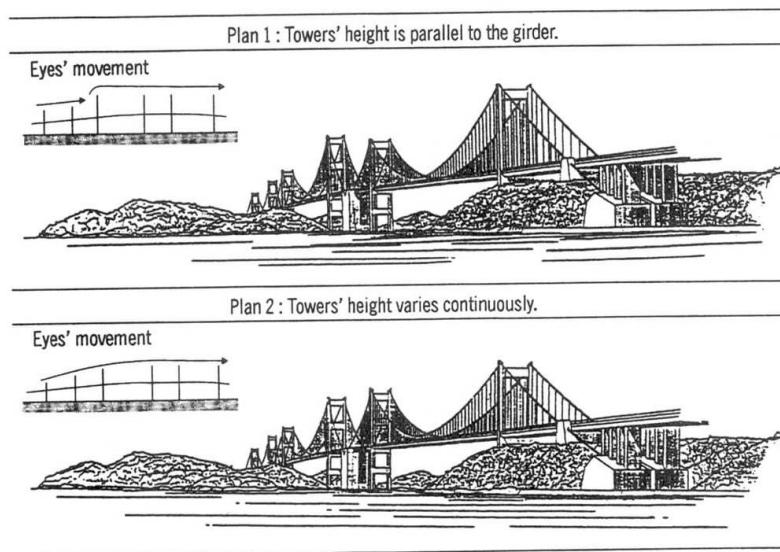


Fig.2 Comparison of looks in different tower heights

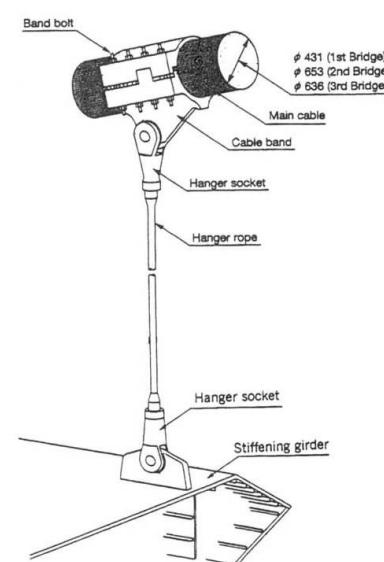


Fig.3 Hanger rope fixing structure

3. Cables

Cables are wired with the prefabricated-strand method. Every strand is comprised of 127 recently developed high-strength steel galvanized wires of 180 kgf/mm² which were also adopted for the Akashi Kaikyo Bridge. Each hanger rope is a bundle of 5 mm-diameter galvanized steel wires of high-strength grade arranged in parallel. The rope surface is covered with polyethylene for corrosion protection of the hanger rope, to which fluorocarbon resin coating is further applied for coloring. The hanger rope is connected both to the main cable and the girder with pin.

4. Girders

Stiffening girder is erected by the perpendicular hanger method. A prefabricated-at-factory girder blocks on a barge is placed under the perpendicular location of the erection firstly, and it is lifted to fix to the hangers by the lifting machine on the cables. In order to stand the strong tidal current, a sailing barge, was originally developed to secure a certain position without mooring any anchor.

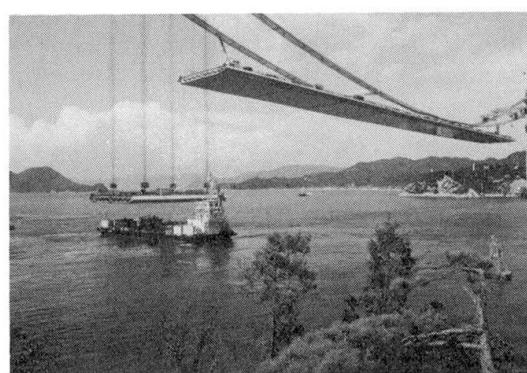


Fig.4 View of the girder erection