

**Zeitschrift:** IABSE reports = Rapports AIPC = IVBH Berichte  
**Band:** 79 (1998)  
  
**Artikel:** Construction of a V-shaped rigid-frame bridge with high piers  
**Autor:** Irube, Taakao / Kawato, Takira  
**DOI:** <https://doi.org/10.5169/seals-59892>

### **Nutzungsbedingungen**

Die ETH-Bibliothek ist die Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Zeitschriften und ist nicht verantwortlich für deren Inhalte. Die Rechte liegen in der Regel bei den Herausgebern beziehungsweise den externen Rechteinhabern. [Siehe Rechtliche Hinweise.](#)

### **Conditions d'utilisation**

L'ETH Library est le fournisseur des revues numérisées. Elle ne détient aucun droit d'auteur sur les revues et n'est pas responsable de leur contenu. En règle générale, les droits sont détenus par les éditeurs ou les détenteurs de droits externes. [Voir Informations légales.](#)

### **Terms of use**

The ETH Library is the provider of the digitised journals. It does not own any copyrights to the journals and is not responsible for their content. The rights usually lie with the publishers or the external rights holders. [See Legal notice.](#)

**Download PDF:** 29.04.2025

**ETH-Bibliothek Zürich, E-Periodica, <https://www.e-periodica.ch>**

# Construction of a V-Shaped Rigid-Frame Bridge with High Piers

**Taakao IRUBE**

Chief Eng.  
TTK Co.  
Tokyo, Japan

Born 1956, received his civil engineering Master's degree 1981 from Tokyo Metropolitan University.

**Takira KAWATO**

Constr. Mgr  
Honshu-Shikoku Bridge Authority  
Hyogo, Japan

Born 1954, received his civil engineering degree 1981 from Osaka Institute of Technology.

## Summary

Nadagawa bridge is the V shaped rigid steel-frame bridge with five continuous spans having total length of 276 meters. The V shaped pier is 45.7 meters high and the highest one among similar type bridges in Japan.

The huge girder block erection method or the inclined cable erection method is generally used for construction of these types of bridges. However, for the erection of this particular bridge, the staging method providing cranes were used, and in order to stabilize the V shaped piers at correct position, the steel wires were provided. This paper presents outlines of this erection method, in particular of wire tensions control.

## 1. Outline of bridge

This bridge is located in Awaji Island on Kobe-Naruto route of the Honshu-Shikoku Highways, and is designed as to harmonize well with surrounding landscape. The type of this bridge is the V shaped rigid steel-frame bridge as shown in Fig.1 and 2.

## 2. Construction Methods

For the erection of this bridge, three construction methods were used. The staging method providing crawler crane was used in P6 (V-pier and girders), and the staging method providing tower crane in P7 (V-pier and girders), and the launching method in girders between P7 and A2 (Fig.3).



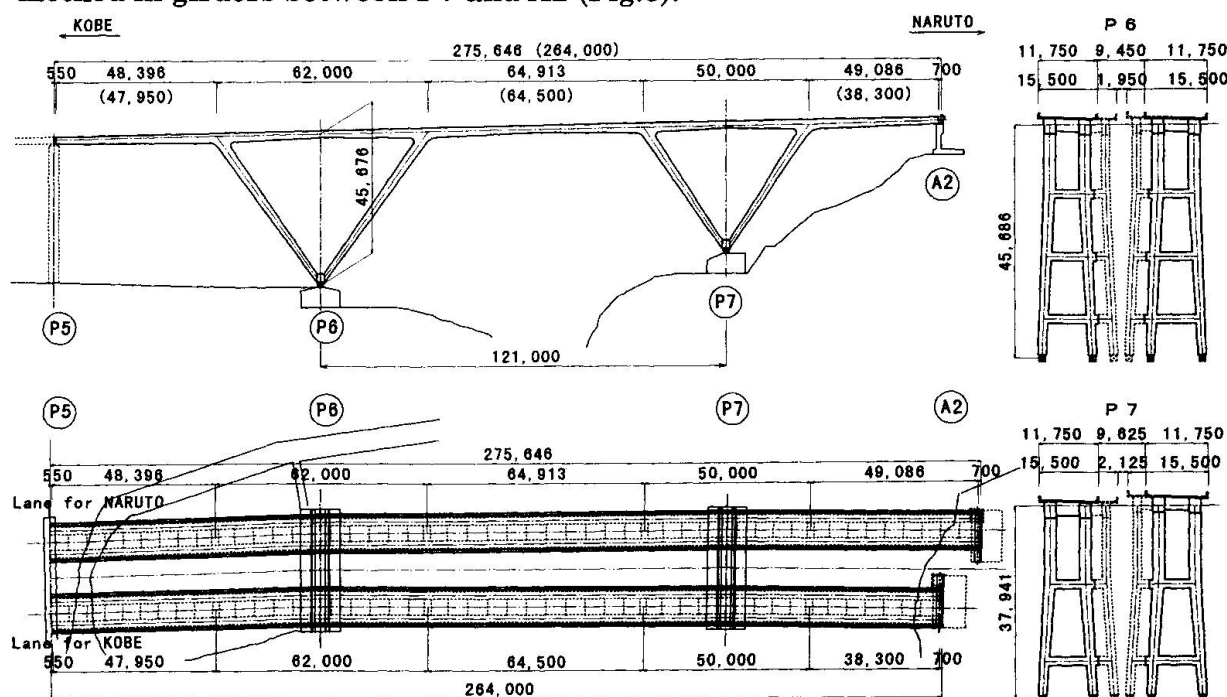


Fig.1 General View

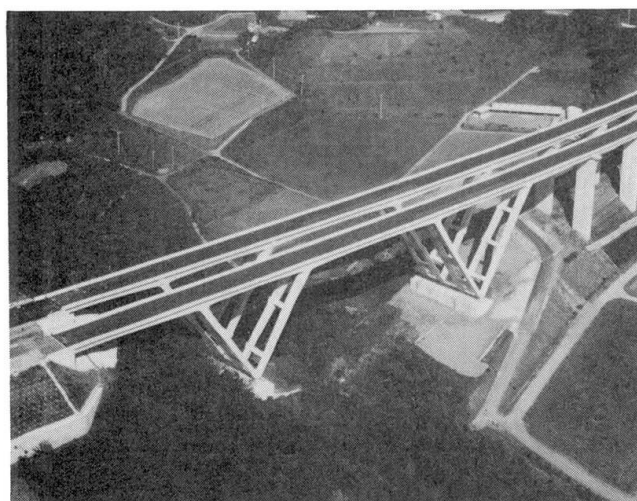


*Fig.2 Nadagawa Bridge*

(1) Closure of side girder

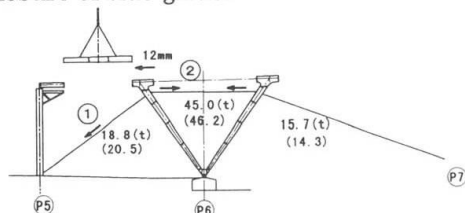


(2) Closure of girder in V-pier

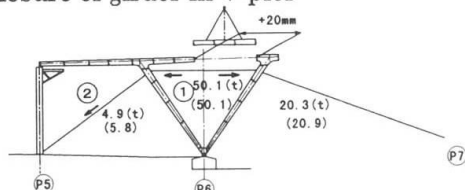

( ) : design values of wire tensions

*Fig.4 Control of wire tensions*

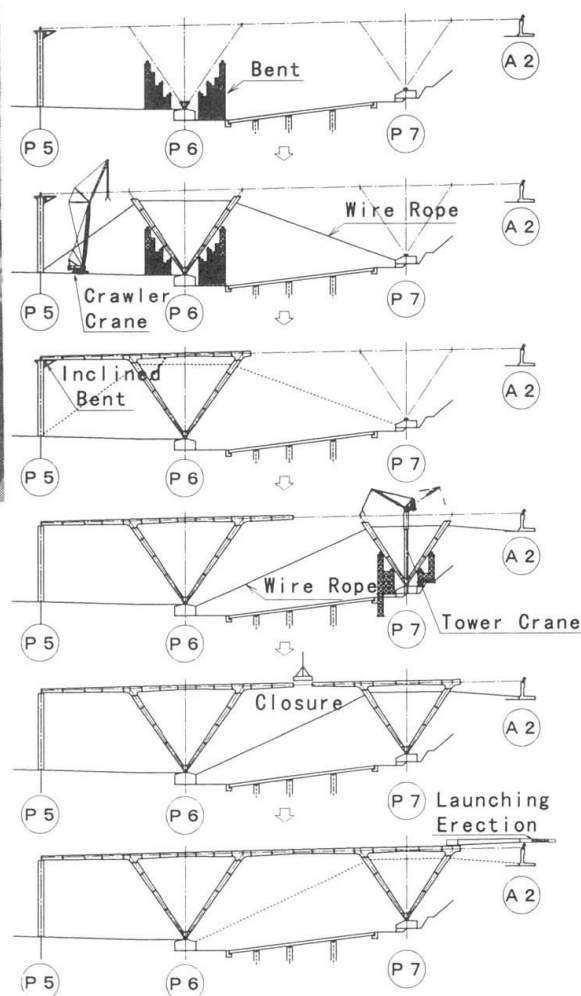

*Fig.3 Stages of Construction*

In first stage, the V pier was supported by bents, and then supported by wire ropes. In order to stabilize the V shaped piers at correct position, the steel wires were provided. The top end of these wires were anchored to the V shaped column and the bottom ends were anchored to the concrete foundation of adjacent piers. The stringent wire control was required in order to maintain wire tension at accurate values.

The shape of V pier were measured by 3-dimentional theodolite as coordinates and wire tensions were measured by strain gauges at tension bars in a pulling apparatus. The computer monitoring system which can constantly measure the wire tensions was introduced. It was controlled at each erection step so as to ensure the wire tensions and the shape of V pier within the design values. The controlling system of the wire tensions was useful to adjust the elevation and the gap of each girder at the stage of the closure erection(Fig.4).

### 3. Conclusion

This construction method has the advantage as shown below.

- (1) This method is capable of erecting girders even at the site where the bents erection is difficult.
- (2) It is possible to adjust the elevation and the gap of each girder at the stage of the closure erection with the help of wire ropes.
- (3) It is unnecessary to build the temporary steel towers and the huge foundations of cable anchors as used in the ordinary cable erection method.