

Low-loss Mach-Zehnder interferometer for laser frequency selection

Autor(en): **Herrmann, Paul P. / Hoffnagle, John A.**

Objektyp: **Article**

Zeitschrift: **Helvetica Physica Acta**

Band (Jahr): **60 (1987)**

Heft 2

PDF erstellt am: **11.09.2024**

Persistenter Link: <https://doi.org/10.5169/seals-115850>

Nutzungsbedingungen

Die ETH-Bibliothek ist Anbieterin der digitalisierten Zeitschriften. Sie besitzt keine Urheberrechte an den Inhalten der Zeitschriften. Die Rechte liegen in der Regel bei den Herausgebern.

Die auf der Plattform e-periodica veröffentlichten Dokumente stehen für nicht-kommerzielle Zwecke in Lehre und Forschung sowie für die private Nutzung frei zur Verfügung. Einzelne Dateien oder Ausdrucke aus diesem Angebot können zusammen mit diesen Nutzungsbedingungen und den korrekten Herkunftsbezeichnungen weitergegeben werden.

Das Veröffentlichen von Bildern in Print- und Online-Publikationen ist nur mit vorheriger Genehmigung der Rechteinhaber erlaubt. Die systematische Speicherung von Teilen des elektronischen Angebots auf anderen Servern bedarf ebenfalls des schriftlichen Einverständnisses der Rechteinhaber.

Haftungsausschluss

Alle Angaben erfolgen ohne Gewähr für Vollständigkeit oder Richtigkeit. Es wird keine Haftung übernommen für Schäden durch die Verwendung von Informationen aus diesem Online-Angebot oder durch das Fehlen von Informationen. Dies gilt auch für Inhalte Dritter, die über dieses Angebot zugänglich sind.

Low-Loss Mach-Zehnder Interferometer for Laser
Frequency Selection

By Paul P. Herrmann and John A. Hoffnagle¹⁾

Institut für Hochenergiephysik, ETH Hönggerberg, 8093 Zürich,
Switzerland

Abstract. A low-loss Mach-Zehnder interferometer of a design proposed by Bergquist and Burkins is described. Replacing a commercial Fabry-Perot etalon with the Mach-Zehnder interferometer increased the single-mode output power of a ring laser operating with Styryl-9 dye by a factor 1.5.

¹⁾ Present address: IBM Corp., 650 Harry Road, K01/801,
San Jose, CA 95120-6099, U.S.A.

Narrowband, tunable lasers commonly use an intracavity Fabry-Perot etalon (FPE) for fine frequency control. Berquist and Burkins¹ have observed that the Mach-Zehnder interferometer (MZI) should be a superior intracavity frequency selector, since the MZI does not suffer from the walk-off loss which is inherent with the FPE. They also proposed an elegant MZI design which eliminates the partially transmitting coatings which lead to severe losses when a FPE is used in a high-power laser². In this note we report that we have constructed a MZI along the lines suggested by Bergquist and Burkins and find that indeed it has lower loss than a commercial FPE.

The design of our MZI is shown in Fig. 1 (cf. Fig. 4 of Ref. 1). It comprises an uncoated fused quartz prism³, which replaces the beamsplitters and one mirror of the classical MZI, and a high-reflecting dielectric mirror. The s-polarized incident ray is split at A into a reflected beam AD of relative intensity r and a refracted beam AC of relative intensity $1-r$, which are recombined at B, after reflections at points D and C. A piezoelectric translator adjusts the spacing between mirror and prism, which determines the resonant frequency of the interferometer. Note that there exists a ray A'A which is neither displaced nor deviated by the ideal MZI and that consequently the MZI may be inserted into a laser cavity without affecting the alignment of the other cavity elements. In practice however a readjustment of the cavity was necessary, caused by the fabrication tolerances of the prism.

The fringe contrast of the MZI, i.e. the rejection of the off-resonant frequencies, is $4r(1-r)$, and the free spectral range is given by $\Delta\nu_{\text{FSR}}=c/\Delta l$, where Δl is the difference in the optical lengths of the paths ADB and ACB. Our design has $\Delta\nu_{\text{FSR}}=75$ GHz and a fringe contrast of 73% at the design wavelength of 830 nm; these values were chosen to match

those of a FPE which we have found suitable for single-mode operation of a ring dye laser.

We have operated the MEZI in a ring dye laser of our own construction, using the dye Styryl-9. With a 2% transmitting output coupler, the insertion loss of the MZI was measured to be 20%, compared to 50% for a commercial FPE, thus demonstrating the expected lower loss of the MZI. For one year the ring laser incorporating the MZI has been in routine use for Doppler-free spectroscopy of Cs^4 , with only slight realignments of the MZI.

Recently it came to our attention that a similar MZI proved to be efficient as a mode selector for a ring laser with the dye Rh6G⁵. The performance was comparable to our device.

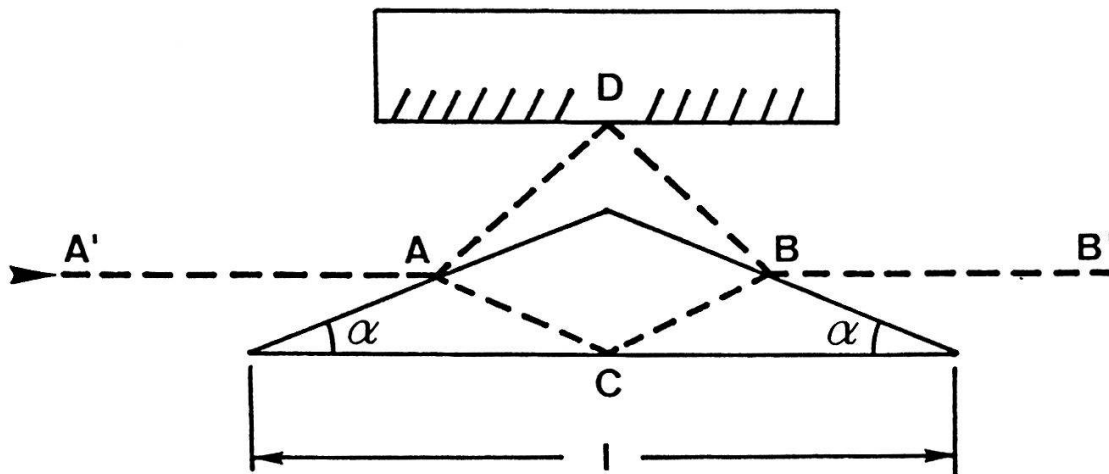


Figure 1: Cross section of the MZI. Light traverses the interferometer along the paths $A'ACBB'$ and $A'ADBB'$. The prism dimensions are $l = 19.7$ mm and $\alpha = 22.5^\circ$.

References

1. J.C. Bergquist and L. Burkins, *Opt. Comm.* 50(1948)379.
2. D. Frölich, S. Stein, H.W. Schröder, and H. Welling, *Appl. Phys.* 11(1976)97.
3. Fabricated by Zünd Optik, Buchs SG, Switzerland.
4. P.P. Herrmann, J.A. Hoffnagle, N. Schlumpf, V.L. Telegdi, and A. Weis, to be published in *J. Phys. B: Atom. Molec. Phys.*
5. Tianchu Li, P. Gill, G.P. Barwood and R.C. Thompson
Conference on Precision Electromagnetic Measurements
(NBS Gaithersburg, June 1986)